

# NOW! *INTERTHERM* HOT WATER HEAT WITHOUT PLUMBING for Impossible Locations

## ARCHITECTS SPECIFICATIONS





Heating units to be Interterm Hot Water Electric Heaters or equal. 1000 watt (3400 Btu) output, 20 gauge steel cabinet. Copper sheathed heating element to be hermetically sealed in liquid filled copper heat radiating assembly. Motor driven fan automatically controlled by liquid temperature. Dimensions not to exceed 3-1/2" height, 22" width, 14" depth. With built-in remote thermostat.

### Electrical Specifications

#UCF 1000 watt, 120 volt, 8.33 amps, single phase, 60 cycle. Dimensions: 22" wide, 14" deep, 3-1/2" high. UL listed. Equipped with plug-in cord and thermostat.

#UCG 1000 watt, 240 volt, 4.17 amps, single phase, 60 cycle. Same dimensions, plug-in cord, requires wall thermostat.

UCG-7 1000 watt. Same as UCG 1000 with exception that it has its thermostat built-in.

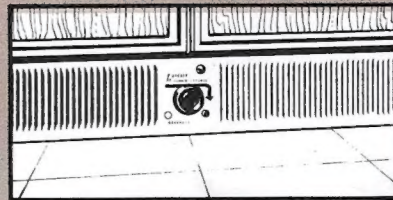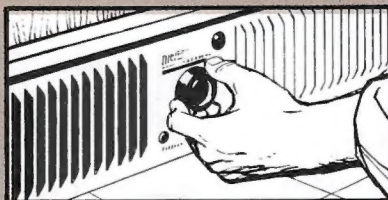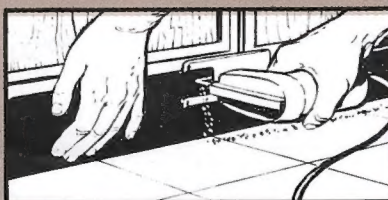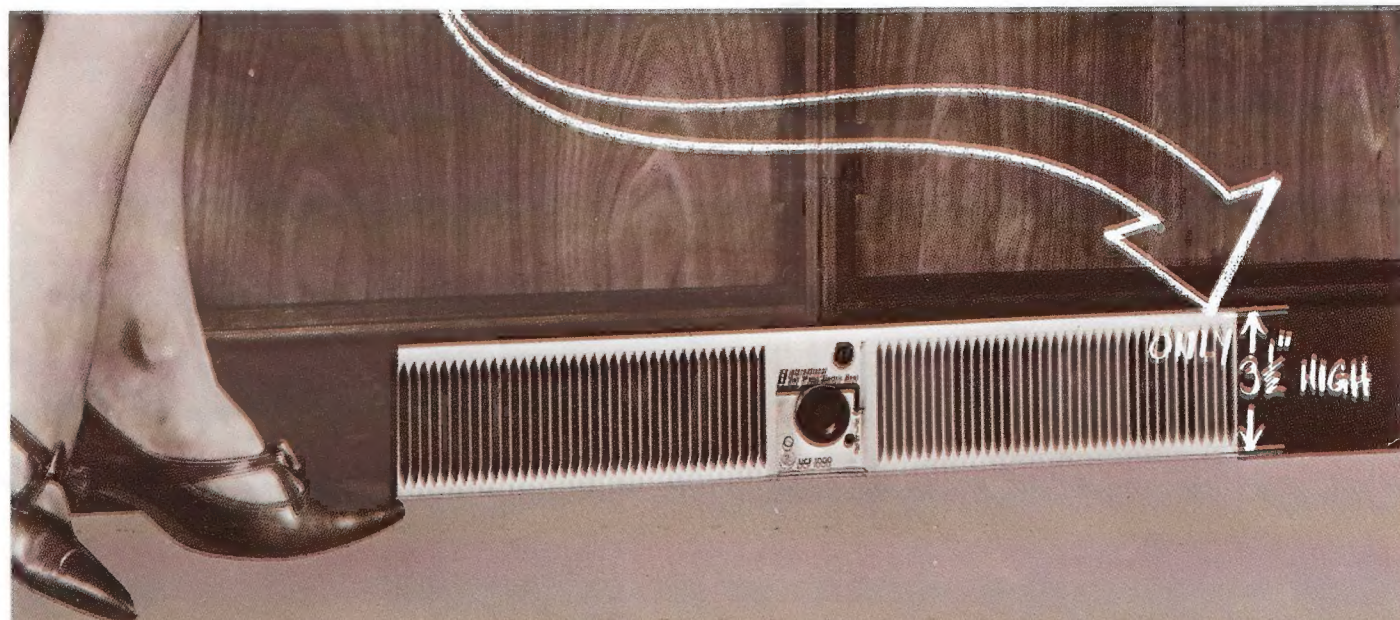

  
**INTERTHERM**®



# these models, too

## in the outstanding Intertherm Hot water heat without plumbing line

### PORTABLE PLUG-IN 120 VOLT MODELS


For individual cold room problems. Built-in thermostat. All models 3¼" deep X 9½" high. For best results always recommend largest unit possible.



Model and watts	for rooms to	length
EP 300	4' x 4'	24-1/8"
EP 500	6' x 6'	36-1/8"
EP 750	8' x 8'	48-1/8"
EP 1000	10' x 11'	60-1/8"
EP 1380	11' x 11'	72-1/8"
EP 1500	12' x 12'	84-1/8"

### PERMANENTLY INSTALLED MODELS

For heating complete homes, apartments, motels with thermostat on wall of each room. 240 volt but other voltages available at no extra cost. All models 9½" high X 3¼" deep.

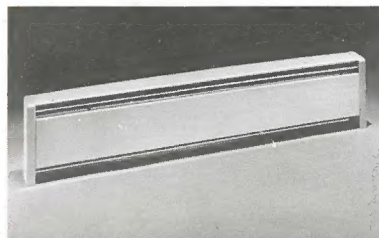

Model and watts	length
EBH 300	23"
EBH 500	35"
EBH 750	47"
EBH 1000	59"
EBH 1380	71"
EBH 1500	83"
EBH 2000	107"

### RECESSED-INTO-FLOOR MODELS

For down-to-floor windows, sliding and large doors. Recessed into concrete or wood floors. Can be located beneath rafters if desired with grill on floor above. All voltages. (Lengths shown are actual. For rough-in lengths add ½ inch to length of each heater).



Model and watts	length
FM- 400-24	35-1/4"
FM- 600-24	47-1/4"
FM- 800-24	59-1/4"
FM-1000-24	71-1/4"
FM-1200-24	83-1/4"
FM-1400-24	95-1/4"
FM-1600-24	107-1/4"

### WALL HEATERS



Same principle of operation as base-board but with the addition of a fan that is extremely quiet in operation. This beautifully designed heater is ideal for bathrooms and other areas where floor space is at a premium. Built-in thermostat standard.


Rough-in dimensions 14-3/8" x 18-3/8" (No headers required).

WA 1000-2 (120 V)  
WA 1000-4 (240V)

### HAZARDOUS LOCATIONS MODELS

Electric wiring and controls are sealed within a solidly bolted UL listed, explosion proof box with positive maximum surface temperatures controlled to provide absolute safety. 200, 240 volts.

Model (gas)	(dust)	watts	length
EX-G	EX-D	1380	71"
EX-G	EX-D	2000	107"



### CLASSROOM

Model and watts	length
HC4200	96"

For the first time in history the remarkable advantages of circulating hot water are available without costly plumbing for schools, churches, and commercial uses. The unit is 12" high x 8" deep and is available in 200, 240, 208 or 277 volts.



U.S. Patents 2,772,342, 3,281,574 and 3,417,227: Canadian Patents 695,903 and 916,702